

# ASYM2 S2



## features:

- highly efficient
- good sound pressure levels
- superb clarity
- ultra compact size and weight
- stack stand fly ability
- hand crafted



The ASYM2 S2 is a 2 way passive full range speaker. The design incorporates a high efficiency 400W 12" low frequency driver and a neodymium 50W 1" horn mounted compression driver. The dispersion is rotatable and 90 x 60 degrees. This flexibility adds functionality to the box in installation situations where horizontal mounting may be required. Mounting brackets are standard and include top and bottom hanging points, a rear 4 bolt Powerdrive compatible plate and a top hat for pole mounting.

All ASYM series designs incorporate asymetry in their construction to reduce standing waves enhancing audio quality and bass response. The cabinet itself is hand crafted to exceptional standards using birch ply, routed glued and screwed throughout to ensure both the sonic credibility of the enclosure and its rugged durability for a long life.

Audio quality is first priority to Noise Control Audio and this box is no exception giving a full, clean respose across the listening range.

## applications:


- indoor / outdoor
- install / event / conference
- front of house / dj monitor
- club and venue

## permanent installations in:

- auditoriums
- theatres
- clubs and bars
- places of worship



## ASYM SERIES ASYM2S2

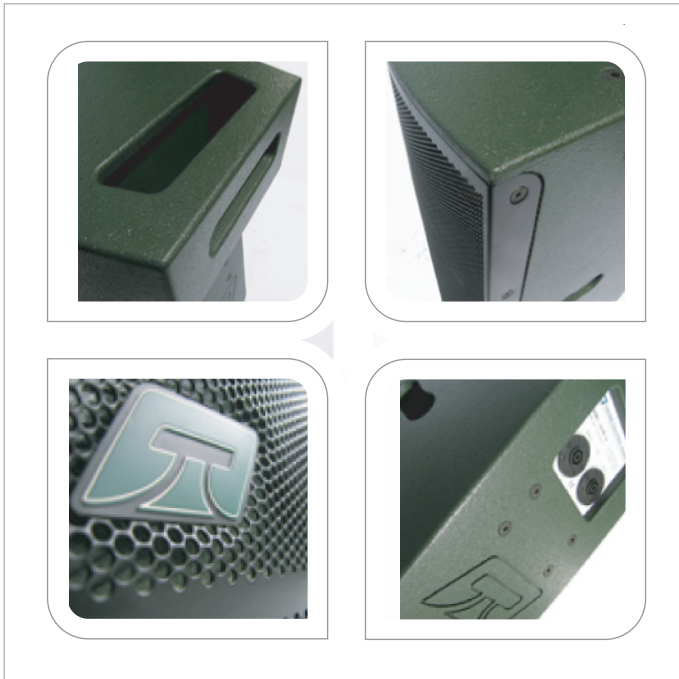


### specifications

Type	PASSIVE 2 WAY FULL RANGE	
	LF	HF
Driver	12"	1" CD
Power	400W	50W
Impedence	8-ohm	8-ohm
Crossover point	2kHz	
Usable frequency range	40HZ- 20kHz +-3dB	
Dispersion	90 x 60 degrees - rotatable	
Sensitivity @ 1w/1m	99.5dB	108dB
Maximum SPL	124dB	
Recomended Amplifier	500w @ 8ohm	
Connectors	2 x Speakon NL4	
Weight	23kg	
Dimensions /mm	Height	598
	Width (front)	414
	Width (rear)	224
	Depth	410
Construction	Hand crafted in 15mm birch ply NCA green water resistant coating STACK-STAND-FLY capable	



### overall dimensions

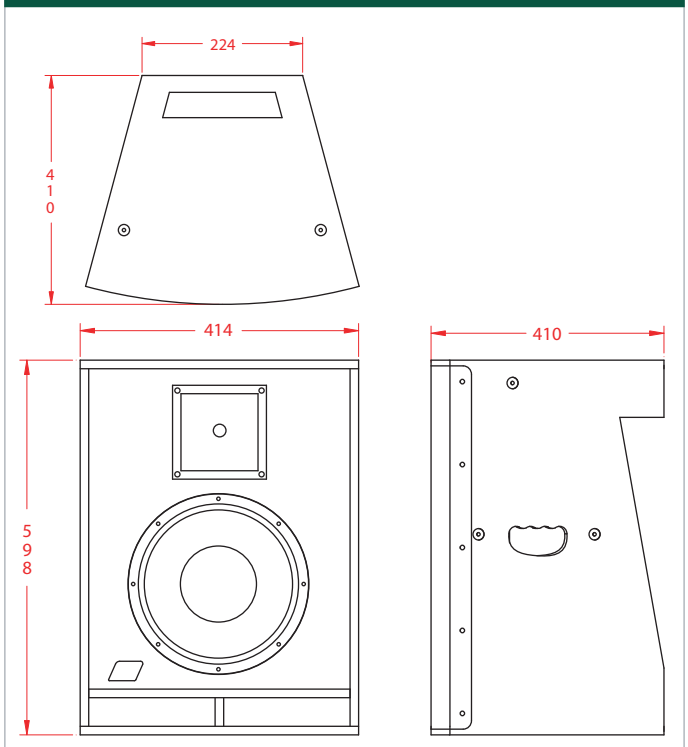

World HQ: Unit 7 Lockwood Ind. Park, Mill Mead Road, London, N17 9QP. U.K.

tel: +44 (0) 208 808 1923

fa:skype: NoiseControlHQ

email: info@NoiseControlAudio.com